



Contact us +1(415) 960 4853

sales@omexindustries.com

www.omexindustries.com

15KVA-480D-208Y/120-K01-AL Three-Phase Ventilated-USA-DOE

Product Details	
KVA	15.00
UPC#	
Enclosure	NEMA 3R Ventilated
Phase	Three-Phase
Line Voltage	480V-Delta
Load Voltage	208V/120V
E/S Shielded	No
Windings	Aluminum
Temp. rise	150°
Frequency	60 Hz
Taps	2 - 2.5% FCAN; 4- 2.5% FCBN
Impedance	3.5 – 5%
Total loss (170°C)	545 W
Regulation (full load)	PF 1.0=3.30 PF 0.8=


Product Details	
Efficiency Type	DOE-2016
Minimum Efficiency {35%}	97.89
Busbar Termination	Primary: AL
	Secondary: AL
Sound	45 db Max
Approvals	UL, cUL, DOE

Weight & Dimensions (Imperial / Metric)		
A	29.5"	Will be submitted after enclosure design.
B	21"	
C	17.75"	
D	Will be submitted after enclosure design.	
E	Will be submitted after enclosure design.	114.30 kg
Est Ship Wt. approx.	252.00 lbs.	

T480E Wiring Diagram & Connections


Wiring Diagram

Primary: 480 Volts Delta
Secondary: 208Y/120 Volts

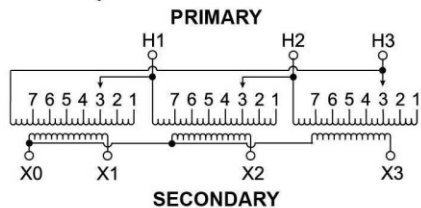

Connections

Primary Volts	On Each Coil Jumper Taps To	Primary Lines Connect To
504	1	H1, H2, H3
492	2	H1, H2, H3
480	3	H1, H2, H3
468	4	H1, H2, H3
456	5	H1, H2, H3
444	6	H1, H2, H3
432	7	H1, H2, H3
Secondary Volts	Secondary Lines Connect To	
208	X1, X2, X3	
120	Between X0 and X1 or X2 or X3	
1 phase		

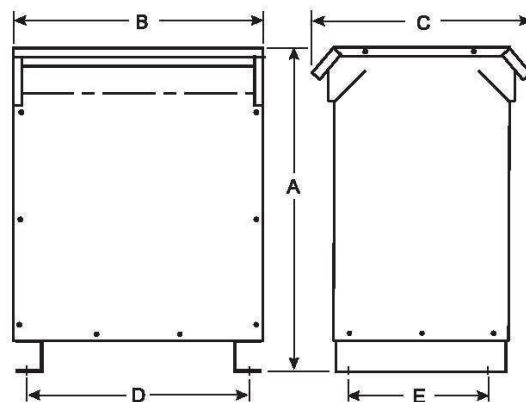

Additional Information

How to Buy: This item is normally available through our Stocking Representatives and Distributors.

Wall mounting bracket kit	223-7008-075
Mounting kit with dripan	400-4701-227