



Contact us +1(415) 960 4853

sales@omexindustries.com


www.omexindustries.com

225KVA-208D-480Y/277-K01-AL Three-Phase Ventilate-USA-DOE

Product details	
KVA	225.0
UPC#	
Enclosure	NEMA 3R Ventilated
Phase	Three-Phase
Line Voltage	208D
Load Voltage	480Y/277V
E/S Shielded	No
Windings	Aluminium
Temp.rise	150°C
Frequency	60Hz
Taps	1 - 5% FCAN; 2 - 5% FCBN
Impedance @ 170 °C 60Hz	4.00% (± ANSI TOLERANCE)
Insulation Class	220°C

Product details		
Efficiency Type		DOE-2016
Minimum Efficiency {35%}		98.94
Busbar Termination		Primary : AL
		Secondary : AL
Approvals		uL, cUL, DOE
Weight & Dimensions (Imperial / Metric)		
A	53.16"	135.00 ems
B	40.55"	103.00 ems
C	30.92"	78.50 ems
D	37.52"	95.30 ems
E	21.02"	53.40 ems
Est Ship Wt	1804 lbs	818 kg






Wiring Diagram		
Primary : 208 Volts Delta		
Secondary : 480Y/277 Volts		
SECONDARY		
PRIMARY		
Connections		
Primary Volts	On Each Coil Jumper Taps To	Primary Lines Connect To
217	4 - 5	X1, X2, X3
208	3 - 5	X1, X2, X3
199	3 - 6	X1, X2, X3
191	2 - 6	X1, X2, X3
Secondary Volts	Secondary Lines Connect To	
480	H1, H2, H3	
277 1Phase	H1 to H0 H2 to H0 H3 to H0	

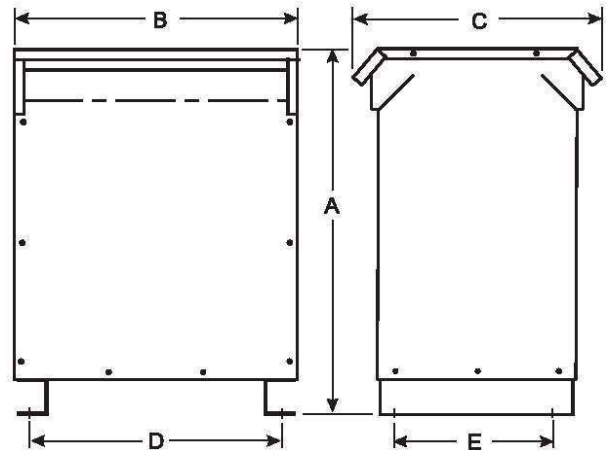

Additional Information	
How to Buy: Contact your local representative.	
Wall mounting bracket kit	
Mounting kit with drippan	

All specifications subjects to change. Contact Factory for certified drawings. © 2026 OMEX Industries LLC.

225KVA-208D-480Y/277-K01-AL

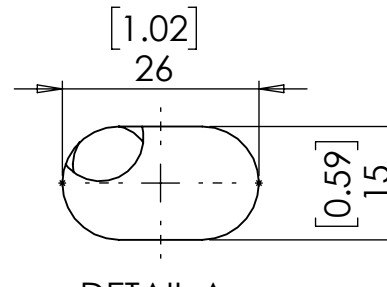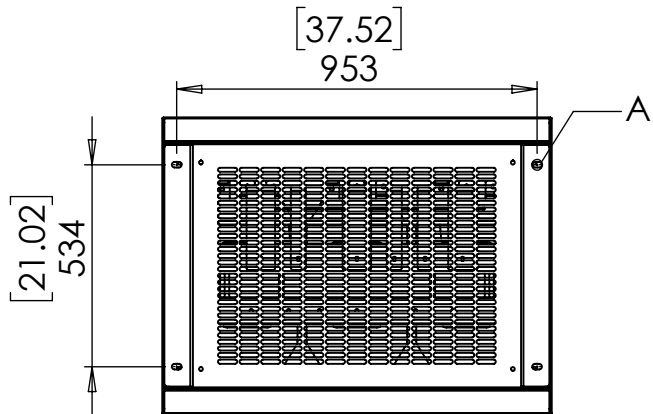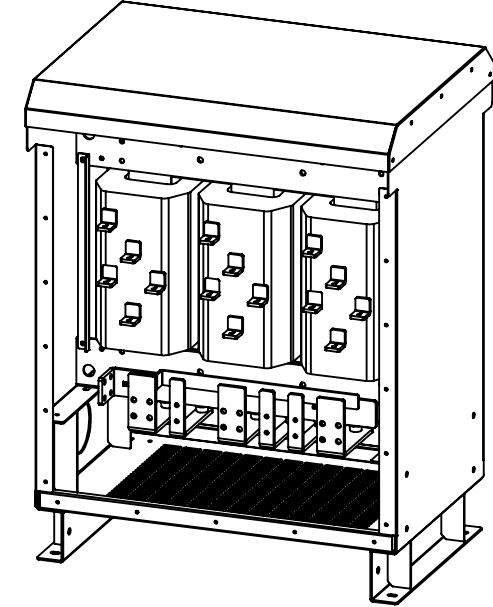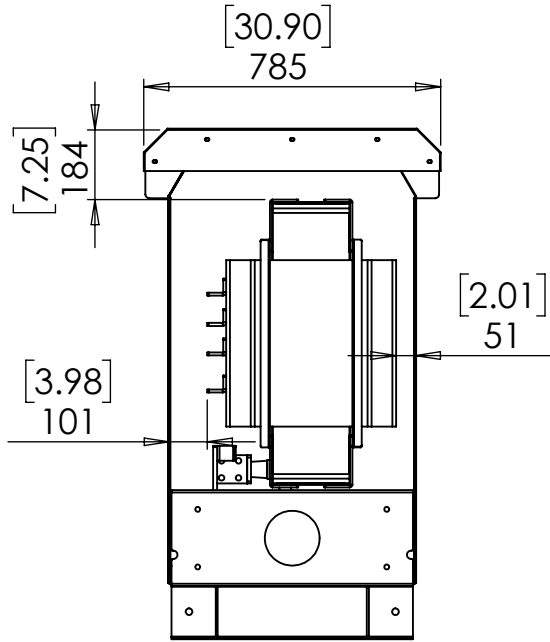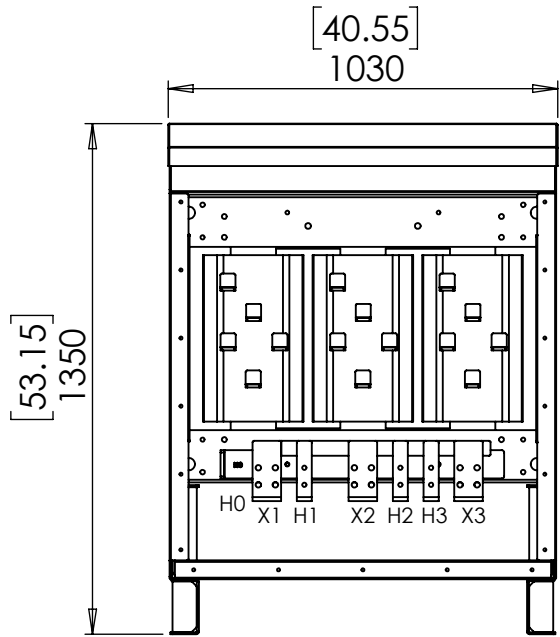

DETAIL A
SCALE 1 : 1

IP grade : 3R(Outdoor application,As per UL 1561)
Finishing : ANSI 61 Grey colour powdered coated

REV	Description	Name:	Date :	Tolerances :	OMEX OMEX Industries 9859 7th Street, Suite G-L, Rancho Cucamonga, CA 91730	Title : 225kVA_GA_drawing		
04				For Holes ±0.1		Drawing No :225KVA-208D-480Y/277-K01-AL		
03				For P.C.D ±0.1		Material :		
02				For thk ±0.05		QTY: xx		
01				For Angle ±1°		Rev : 00 Do not scale		
				All dimensions are in 'mm' unless specified.	Drawn by :	Checked by :	Approved by :	Size : A4 Pages : 1/1
					Date : 06-Feb-26			